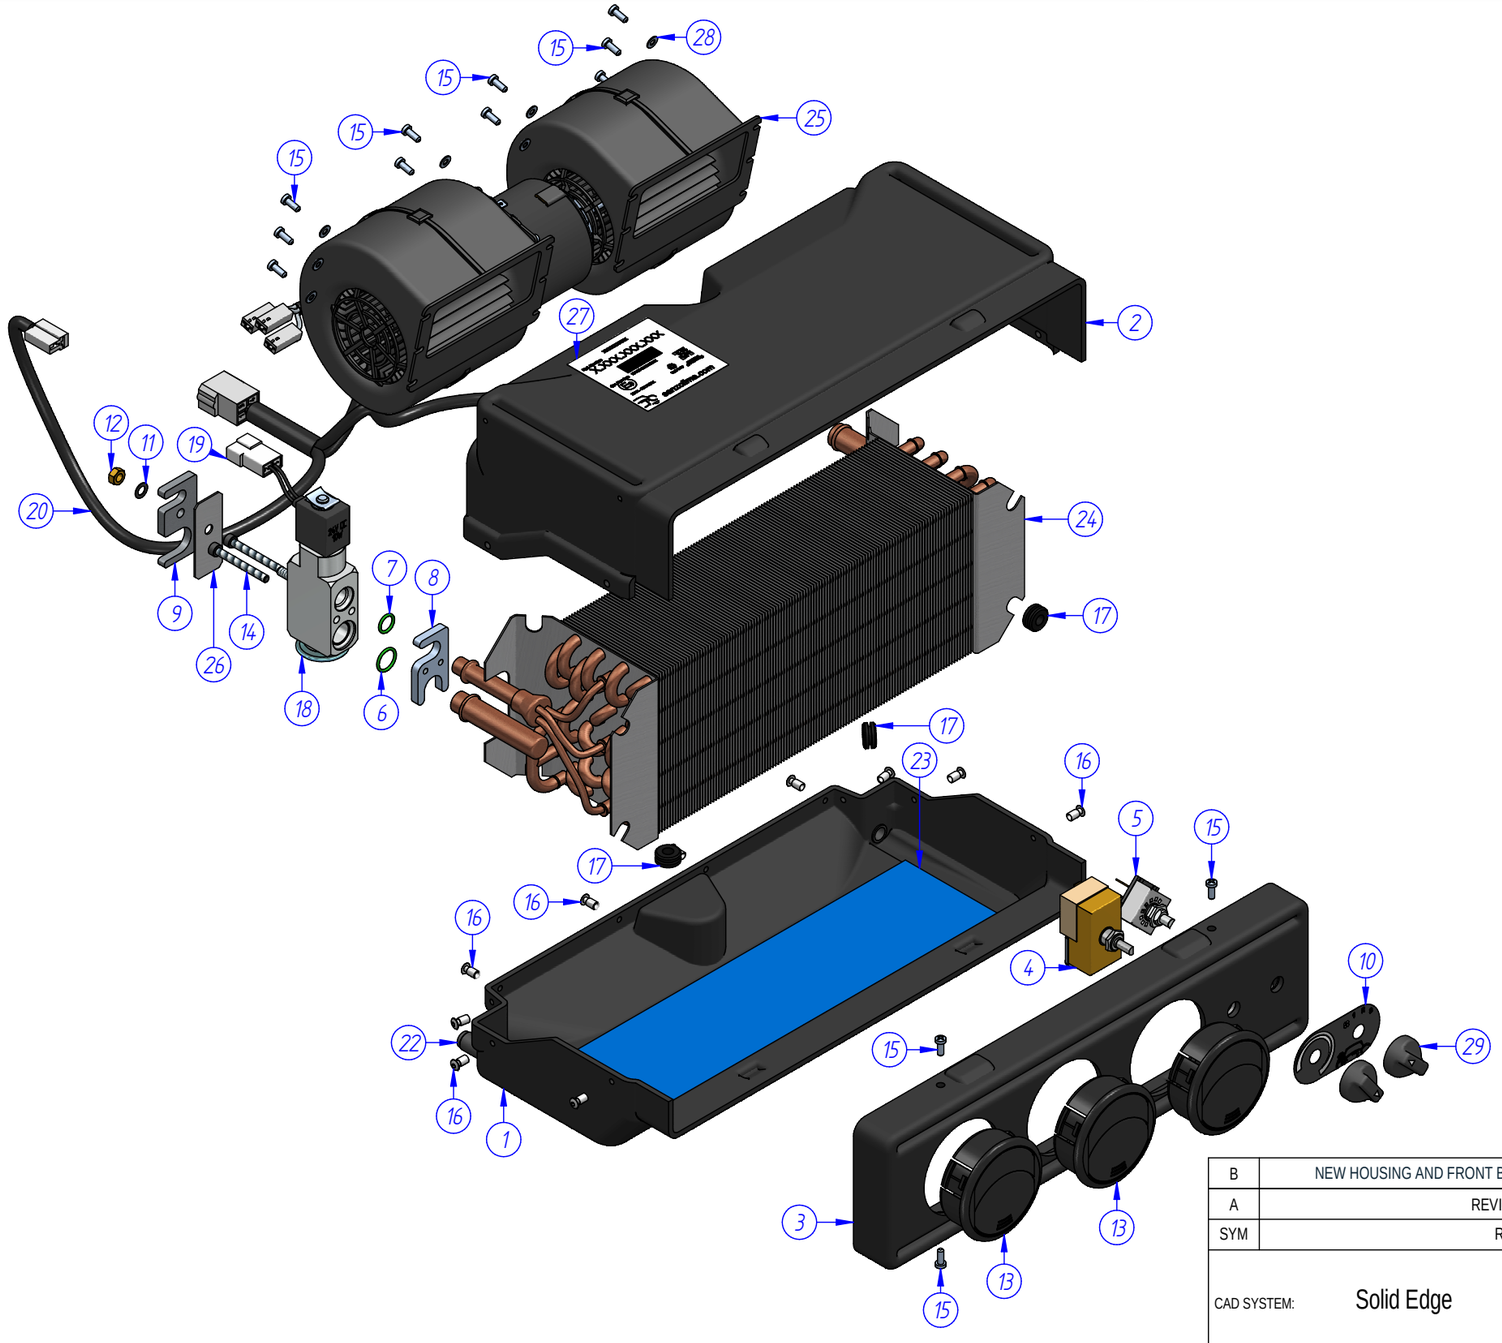

ITEM	PART NO.	PART NAME	QUANTITY	MATERIAL	DESCRIPTION
1	6.705.100.010	BOTTOM HOUSING V.2	1	ABS/ASA	
2	6.705.100.009	TOP HOUSING	1	ABS/ASA	
3	6.705.100.012	NOZZLES HOUSING	1		
4	7.708.000.013	THERMOSTAT	1		
5	7.704.500.001	SWITCH 4 POSITION	1		
6	6.140.200.058	O-RING	1	NBR	DIA 14x1,8mm.
7	6.140.200.057	O-RING	1	NBR	Φ 10,6x1,8mm G8
8	6.911.300.036	FLANGE	1	Steel	PER ISO 4520
9	7.147.400.246A	FLANGE	1	Steel	
10	6.989.900.172	DUAL CONTROL MASK	1	Polyester Autotype 150µm	
11	6.900.100.033	WASHER, LOCK	1	Steel	6mm. DIA DIN 137
12	6.903.300.005	NUT	1	Steel	M6 PER DIN 555
13	7.145.500.101	NOZZLE	3		Φ68 mm
14	6.903.400.288	SCREW	2	Steel	M5x45 DIN 912
15	6.903.400.155	SCREW Φ4,1x11	14	Steel	
16	6.910.400.025	RIVET	10	Aluminum	PER DIN 674
17	6.140.200.059	GROMMET.	3	Rubber	Φ 7,5 mm.
18	7.147.400.342	SOLENOID VALVE	1		
19	8.888.080.203	CONNECTOR 2 PINS T/H	1	Polyamide 6.6	AMP 180908-0
20	7.144.400.977	ELECTRICAL HARNESS	1		
21	8.888.080.007	PIN MALE	2		AMP 60006-2
22	6.147.400.168	DRAIN PIPE	2	Polyamide	Φ 12,8 mm.
23	6.147.400.120	FILTER	1	PPI 20-10	335x85mm.
24	7.145.400.363	EVAPORATOR+RADIATOR	1		
25	8.141.320.245	BLOWERS	1		24 V. 3 Speed.
26	6.141.310.288	VALVE COVER	1	Aluminum AW-5754 H111	60x25mm.
27	LABEL	LABEL	1	Polyester	75 x 75 mm.
28	6.900.100.013	WASHER, FLAT	10	Steel	4mm. DIA PER DIN 125
29	6.144.400.571	BUTTON	2		

SYM	REVISION RECORD	DATE	BY	ENGR.	M.E.	NPCA NO.
B	NEW HOUSING AND FRONT BLACK FORMAT / NEW CONTROL KNOBS	01/06/2020	J.R.	C.P.	-	-
A	REVISED INITIAL RELEASE	10/08/2015	J.R.	L.E.	ENGNR	-

CAD SYSTEM: Solid Edge

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS SHOWN ARE MILLIMETERS, WITH IMPERIAL CONVERSIONS IN [INCHES].

FIRST ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED TOLERANCES ON:

Precision Rate	more than 0.5 to 3	more than 3 to 6	more than 6 to 30	more than 30 to 120	more than 120 to 315	more than 315 to 1000	more than 1000 to 2000	more than 2000 to 4000
fine	±0,05	±0,05	±0,1	±0,15	±0,2	±0,3	±0,5	±0,8
medium	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2
gross	±0,15	±0,2	±0,5	±0,8	±1,2	±2	±3	±4
very gross	-	±0,5	±1	±1,5	±2	±3	±4	±6

MATERIAL: -

TREATMENT: -

SURFACES	HOLE DIA. H13 / AXEL DIA. h13 / THREAD SH8	HOLE SPACING ± 0.4 ±[.015] NON-CUMULATIVE	HOLE LOC ± 0.2 ±[.0078]
√AA			

QUANTITY: - | RIGHT: - | LEFT: -

WEIGHT: | MFG/PURCH: -

DIMENSIONS IN (PARENTHESIS) ARE FOR INFORMATION ONLY. TOLERANCES DO NOT APPLY.

SANZ clima

Leader in HVAC Systems and innovation

www.sanzclima.com

C/ Ingeniero Torres Quevedo 6
28022 Madrid, Spain
Phone +34 91 761 38 34
Fax +34 91 747 83 34
mail@sanz.eu

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO SANZ CLIMA CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF SANZ CLIMA CORPORATION.

APPLICATION: CN24XMS16P

TITLE: A.A. SYSTEM 24V.

SIZE	DRAWING NO.	REV
A3	CN24XMS16P SHEET - OF -	B

NEXT DRAWING: | SCALE: 1:4

THIS DOCUMENT IS SUPPLIED, DESIGNED AND DOCUMENTED ON SANZ CLIMA FORMAT. THE ORIGINAL IS ON FILE AT SUPPLIER LOCATION. THE SUPPLIER IS RESPONSIBLE FOR PROVIDING SANZ CLIMA REVISION "FILE PRINT" FOR INTERNAL DISTRIBUTION.

NO DEVIATION FROM THE CONSTRUCTION DEFINED BY AN APPROVED SAMPLE OR DETAILED SPECIFICATION (ON FILE IN SANZ CLIMA ENGINEERING DEPARTMENT) WILL BE MADE WITHOUT APPROVAL FROM SANZ CLIMA.

DO NOT REVISE THIS DRAWING WITHOUT REFERRING TO MODEL: | SUPERSEDES: | SIMILAR TO: | PRINT DISTRIBUTION:

REV.:

DWG NO.: CN24XMS16P

COMMODITY CODE: